





- very rugged
- reliable
- operating temperature up to +140°C
- measurement range -50 to +910°C -  
for thermocouple type K
- inductive power supply
- high accuracy
- simple installation

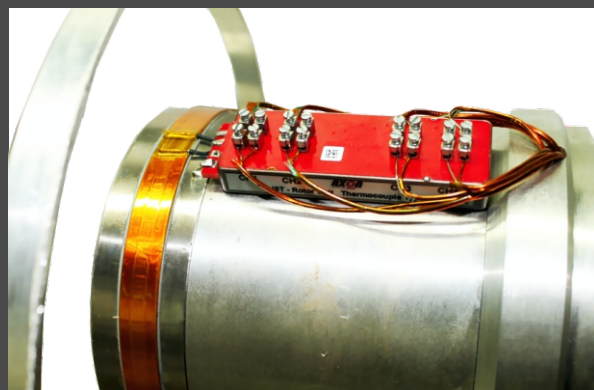


## 8-CHANNEL-TELEMETRY SYSTEM

for temperature measurement on rotating parts

## Telemetry System AXON J8T

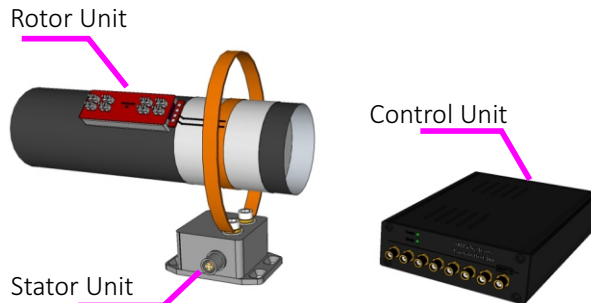

The telemetry system AXON J8T is designed for transmitting thermocouple based measurement signals from rotating shafts or other mechanical parts. Eight sensors can be transmitted simultaneously. It combines smallest possible design with extreme robustness and delivers reliable readings at operating temperatures of up to 140°C in continuous operation, even under the toughest conditions. The inductive, contact-free power supply of Rotor Unit and transducer ensures an interruption-free operation.



### Rotor Unit:

Captures the thermocouple signals and processes the data from the transducer and transmits the fully digitised data stream contactless between the rotating shaft and the Stator Unit.



### Control Unit:

The central control unit and data output of the telemetry system. Generates the inductive supply voltage for the rotor unit and reproduces the data measured on the shaft as a voltage signal. Inductive supply and RF data reception are monitored and always controlled during operation to ensure the best possible data transmission.



### Stator Unit:

Produces the dynamic inductive field which supplies power to the Rotor Unit on the rotating shaft. Simultaneously it receives the digital data stream from the shaft. Distances Up to 70mm between rotor and stator antenna can be realized. Axial and radial relative movements between stator and rotor are covered in an range of several centimeters<sup>(1)</sup>.

<sup>(1)</sup> Depending on application

## Telemetry System AXON J8T



The highly effective inductive power supply of the rotating components allows an uninterrupted use even under harsh conditions.

Even in oil, a stable power- and data transmission is ensured.

The distance between the stator and rotor antenna can easily vary between 1 and 70mm<sup>(1)</sup>.

The intelligent inductive power transmission IPT continuously optimizes the rotor supply voltage during operation.

In addition, the RSSI output<sup>(2)</sup> of the Control Unit provides information about the quality of the received data stream.

1) Depending on application

2) Receive Signal Strength Indicator



### Temperature measurements on:

- Drive shafts
- Prop shafts
- Torque Flanges
- Rotating gearbox parts
- Clutches
- and many more

### The ideal system for 8-channel temperature measurements

The J8T telemetry system is the perfect foundation for highly professional temperature measurements that deliver reliable and highly accurate measurement data, even under the toughest conditions.


Whether in vehicle testing or on the test bench - AXON telemetry systems standing for reliable measurement results under a wide variety of conditions.





# Telemetry System AXON J8T

## Rotor Units

Type	J8T-RT13TL	J8T-RT13HL
Number of channels	8	
Signal conditioning	8 x Thermocouple type K NiCrNi	
Power supply	inductive or battery	
Modulation	PCM (digital)	
Resolution	12 bit (pure data stream)	
Sampling	100 averaged samples / second	
Measurement range	-50°C to + 910°C	
Accuracy	±2°C	
Cold junction compensation	integrated	
Sensor break detection	integrated	
Housing	Aluminium	
Connections	Solder pads	
Dimensions	71 x 23 x 8,2 mm (incl. connections)	
Operating temperature	-40°C .... +125°C	-40°C .... +140°C
Carrier frequency (standard)	13,6 MHz	
Carrier frequencies (optional)	12,6 MHz, 14,6 MHz, 15,6 MHz	
Weight	26 grams	
Degree of protection	IP67 with protectional covering of solder pads	
Conformity	CE	




Type	J8T-RT13TS	J8T-RT13HS
Number of channels	8	
Signal conditioning	8 x Thermocouple type K NiCrNi	
Power supply	inductive or battery	
Modulation	PCM (digital)	
Resolution	12 bit (pure data stream)	
Sampling	100 averaged samples / second	
Measurement range	-50°C to + 910°C	
Accuracy	±2°C	
Cold junction compensation	integrated	
Sensor break detection	integrated	
Housing	Aluminium	
Connections	Miniature screw terminal	
Dimensions	71 x 23 x 14 mm (incl. connections)	
Operating temperature	-40°C .... +125°C	-40°C .... +140°C
Carrier frequency (standard)	13,6 MHz	
Carrier frequencies (optional)	12,6 MHz, 14,6 MHz, 15,6 MHz	
Weight	31 grams	
Degree of protection	IP67 with protectional covering of contacts	
Conformity	CE	

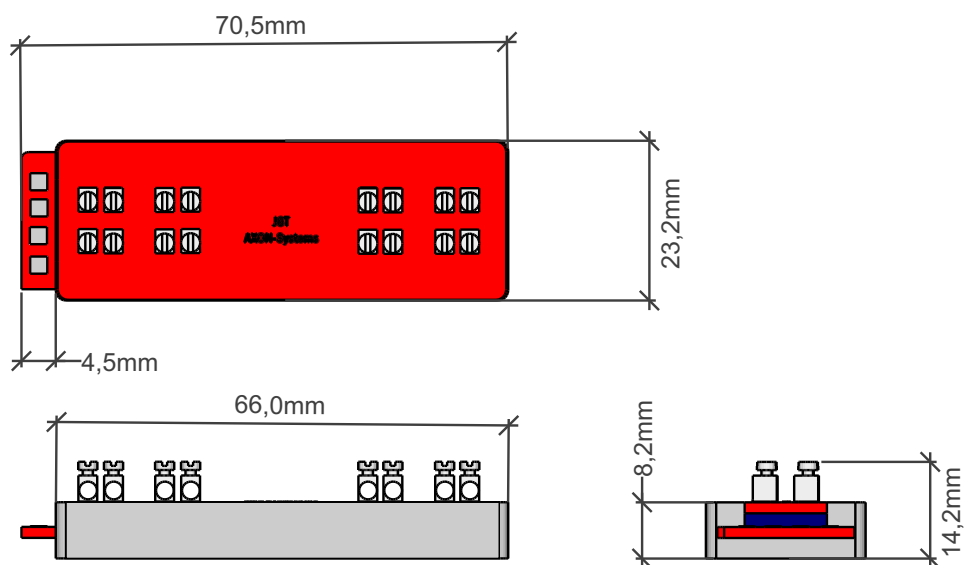

### Stator Units

#### Standard-ringstator

Type	JXD-SR70	JXD-SR70T
Type of transmission	inductively with conductor loop (transmission coil)	
Transmission coil	copper free shapeable Ø 40 .... 1000mm	
Transmission distance	0 .... 70 mm <sup>(1)</sup>	
RF-Reception	wideband (10 MHz .... 30 MHz)	
Housing	Aluminium	
Connections	Fischer 4-pole, IP68	
Dimensions (incl. connections)	63 x 50 x 34,5 mm	
Operating temperature	-40°C .... +105°C	-40°C .... +125°C
Cable length Stator - Control Unit	5m; optional 7m, 8m, 10m, 30m, 50m any cable length up to 200m on request	
Weight	187 grams	
Degree of protection	IP68	
Conformity	CE	

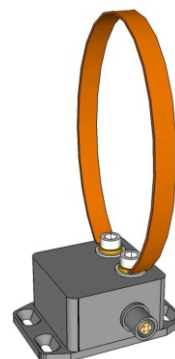

#### Ringstator for high EMC loaded environments

Type	JXD-SR70E	JXD-SR70TE
Type of transmission	inductively with conductor loop (transmission coil), additional EMC-terminal for signal analysis and suppression of disturbance fields	
Transmission coil	EMC-stator coil JX-ECE02 Ø 40 .... 1000mm	
Transmission distance	0 .... 70 mm <sup>(1)</sup>	
RF-Reception	wideband (10 MHz .... 30 MHz)	
Housing	Aluminium	
Connections	Fischer 4-pole, IP68	
Dimensions (incl. connections)	63 x 50 x 34,5 mm	
Operating temperature	-40°C .... +105°C	-40°C .... +125°C
Cable length Stator - Control Unit	5m; optional 7m, 8m, 10m, 30m, 50m any cable length up to 200m on request	
Weight	189 grams	
Degree of protection	IP68	
Conformity	CE	

(1) Depending on application






Especially for use in vehicles  
with electric drive and high  
EMC load

#### recommended accessory

##### JX-ECE02

Free shapeable transmission coil for stator units JX(D)-SR70(T)E with additional EMC-terminal.  
Length 1m, shortenable

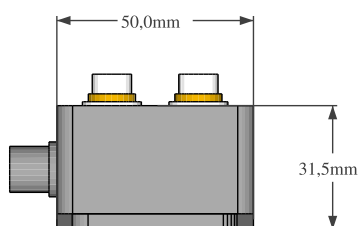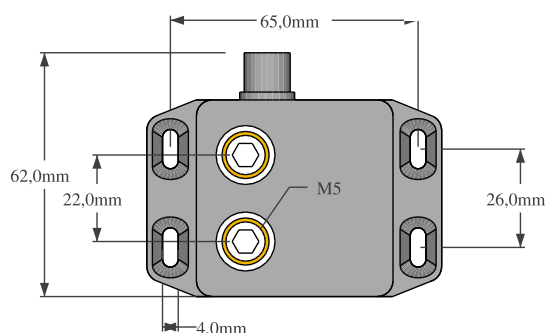



## Telemetry System AXON J8T

### Stator Units

Inductive-Stator without transmission coil

Typ	JXD-SE60	JXD-SE60T
Type of transmission	inductive as Pick-Up	
RF-Reception	wideband (10 MHz .... 30 MHz)	
Housing	Plastic	
Transmission distance	0 .... 60 mm <sup>(1)</sup>	
Dimensions (without cable)	63 x 50 x 34,5mm	
Operating temperature	-40°C .... +105°C	-40°C .... +125°C
Cable length Stator - Control Unit	5m; optional 7m, 8m, 10m, 30m, 50m any cable length up to 200m on request	
Weight	220 grams	
Degree of protection	IP68	
Conformity	CE	

(1) Depending on application

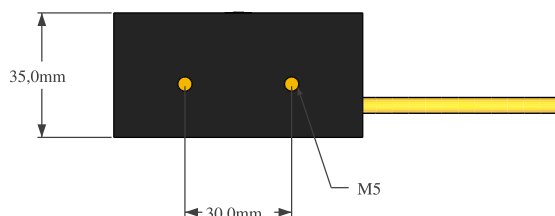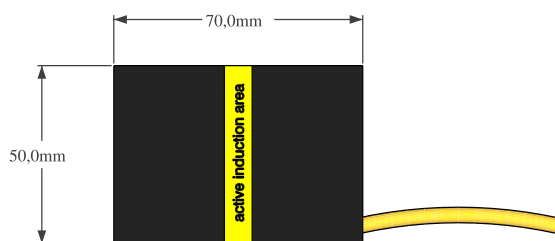







## Telemetry System AXON J8T

### Control Unit

Type	J8T-CE13
Dimensions	190 x 105 x 35mm (incl. connectors)
Supply voltage	9 - 36 VDC
Signal output	8 x SMA; voltage -0,5 ... 9,10V; 10mV/°C linearised
Carrier frequency (standard)	13,6 MHz
Carrier frequency (optional)	12,6 MHz, 14,6 MHz, 15,6 MHz
Signal propagation delay	450 µs
Degree of protection	IP40
Weight	app. 450 grams
Operating temperature	-20°C - +75°C
Overvoltage protection	integrated
Reverse polarity protection	integrated
Power consumption	app. 15 VA
RSSI-Output <sup>(1)</sup>	0 - 4,5 VDC
Conformity	CE

(1) Receive Signal Strength Indicator

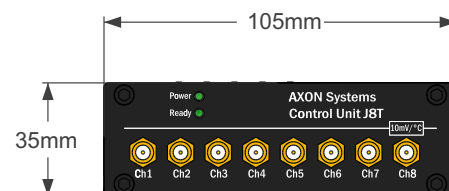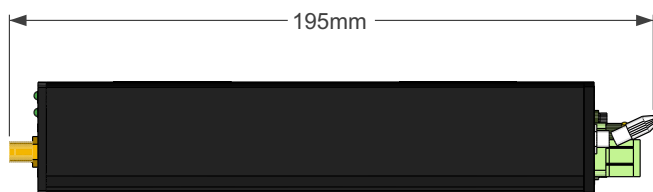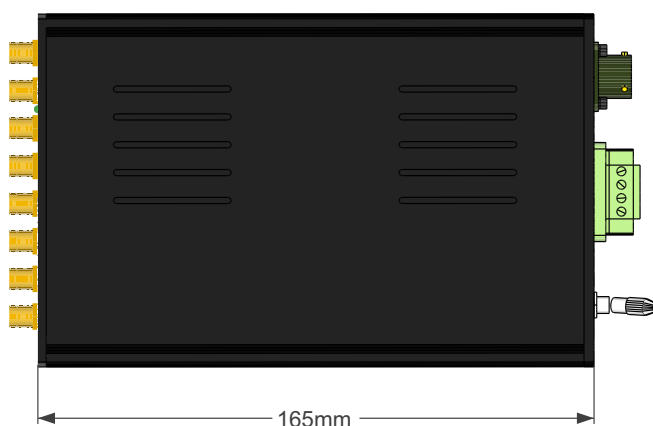

81 Rue des Joncs Marins, 91620 La VILLE-du-BOIS

Web: [www.axilane.com](http://www.axilane.com) - Mail: [info@axilane.com](mailto:info@axilane.com)

Tél +33.620.17.42.35 - Fax +33.955.60.40.20

*Tout ce qui se mesure s'améliore*



The product is in compliance with the requirements of the following European directive:

- 199/5/EC Radio and Telecommunications Terminal Equipment (R&TTE)
- 2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)

The compliance with the requirements of the European Directive was proved by the application of the following harmonized standards:

- R&TTE: EN 300 330-2 V1.5.1  
EN 301 489-1 V1.9.2  
EN 301 489-3 V1.6.1  
EN 50364:2010  
EN 55011:2009+A1:2010  
EN 60950-1:2006 + A11:2009 + A12:2011 + A1:2010 + A2:2013
- RoHS: EN 50581:2012


The object of the declaration described above is in conformity with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

# Telemetry System AXON J8T

## AXON „J“-series telemetry systems as an overview

### - AXON J1

robust 1-channel telemetry system  
for strain gauge measurements,  
analogue transmission



### - AXON J1DB

digital 1-channel telemetry system  
for strain gauge measurements with  
monitoring of the rotor power supply



### - AXON J2D

digital 2-channel telemetry system for  
the simultaneous transmission of two  
strain gauge signals



### - AXON J2DT

digital 2-channel telemetry system for  
the simultaneous transmission of one  
strain gauge and one thermocouple signal



### - AXON J1T

digital 1-channel telemetry system for  
the transmission of one thermocouple  
signal



### - AXON J2T

digital 2-channel telemetry system for  
the simultaneous transmission of two  
thermocouple signals



### - AXON J4T

digital 4-channel telemetry system for  
the simultaneous transmission of four  
thermocouple signals



### - AXON J8T

digital 8-channel telemetry system for  
the simultaneous transmission of eight  
thermocouple signals





# Applications


## Telemetry System AXON J8T

Shaft applications for torque- and temperature measurements  
planned in detail - professionally built - delivered quickly

Another focus of AXON is the production of customized torque- and temperature measurement shafts. Careful planning includes the preparation of release drawings, which allow the user to check all dimensions and details for execution.

The flexibility of the AXON telemetry systems enables the construction of measuring shafts that work in the most difficult space conditions.

Sensors and electronics are sealed in multiple layers. A high-strength glass fiber composite protects the application from water, oil and mechanical damage. Thus, the maintenance-free applications are ideally suited for long-term driving tests.

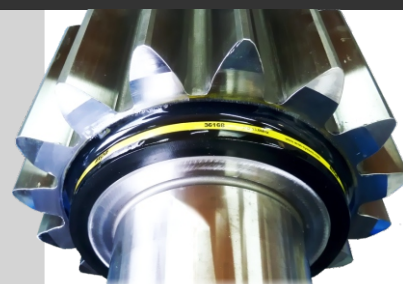

State-of-the-art technology  
in a robust package



The flexible design options  
of the AXON telemetry  
systems allow countless  
application variants.

- Telemetry
- Application
- Calibration

from one source  
fast and reliable

**From development to  
customized solutions -  
all from one hand**

- Development and production
- Application of measurement shafts
- Strain gauge application and calibration

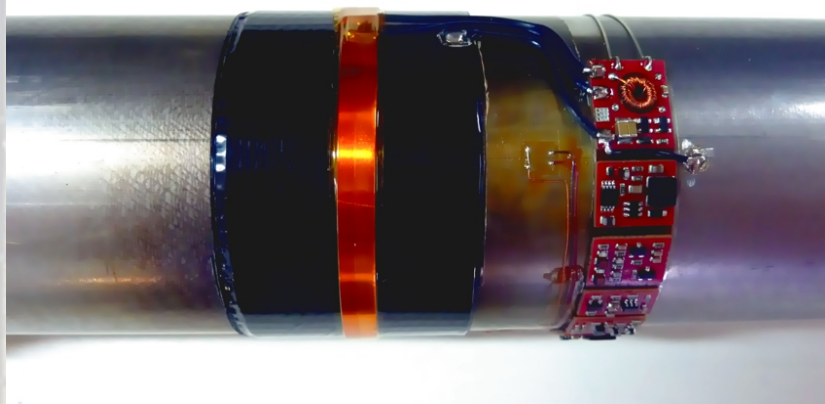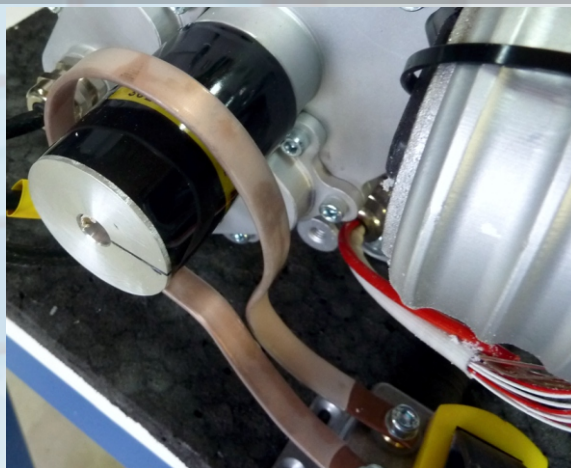

Whether by phone, e-mail or in person-  
our support is always available for  
questions about our systems - fast and  
easy!

Our experienced engineers and  
technicians will be happy to assist you  
in planning your measurement tasks-  
contact us!

Contents and illustrations of this datasheet have been  
elaborated to the best of our knowledge and with  
utmost diligence we reserve the right of error and technical  
modifications.